





- 9–14 Passenger Capacity
- Meets Federal School Bus Standards
- Available with Integrated Child Seats

# multi-function school activity bus

NARROW BODY

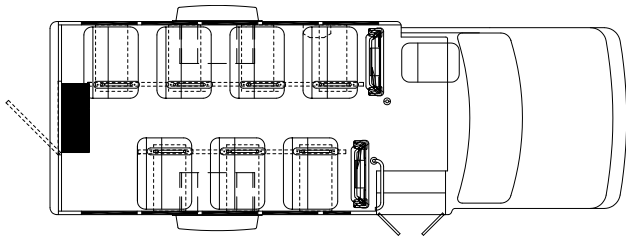

21' 14 Passenger

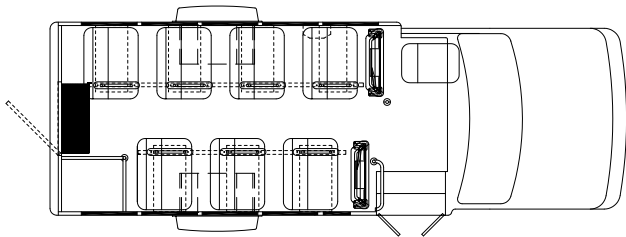

21' 14 Passenger with Storage Rack



C.E. White Integrated child seat



C.E. White Shoulder and lap safety seats, FMVSS compliant

## CHASSIS/BODY SPECIFICATIONS

**SUBFLOOR** – 12-gauge steel superstructure fully welded with floor-level Z-rails, incorporated with chassis-rubber ride capabilities.

**FLOORING** – 3/4" FRP underlayment with undercoating. Floor covered with 1/8" transit rubber. Formed galvanneal steel heat shields over chassis, catalytic converter, and muffler.

**SIDEWALLS** – 1" Polyurethane foam insulation (R-7) enclosed within a fully laminated assembly. Ladder-framed sidewalls are fully welded of 14-gauge steel. Exterior sidewall skins are .024" galvanized steel with baked-enamel paint finish.

**ROOFING** – Roof framing is a fully welded assembly utilizing formed steel-hat section crossmembers, as well as heavy-duty steel roll bars welded at the front, rear, and center of the vehicle. Roof exterior skins are of .024" galvanized steel with baked-enamel paint finish.

**WINDOWS** – 24" x 30" windows, 31% tinted. Clamp ring-style windows. Egress windows installed to meet FMVSS 217 requirements. Operator's curbside window AS-2 rated.

**ENTRY** – Spacious entry (27" x 73" clear opening) doors that operate manually. The 14-gauge steel door frames are fully welded and powder-coated to enhance durability. Door panels have one piece glass panels for the best possible driver's visibility. White step nosing and lighted stepwell standard. Entrance grab rail (left side).

**ELECTRICAL** – Wiring is color-coded with the number and function designated every 12" on the wire to enable identification and circuit traceability. Only premium components built to meet the Society of Automotive Engineers (S.A.E.) and Underwriters Laboratories (U.L.) requirements are used. Electronic control console switch panel.

**WARRANTY** – 12-month/12,000-mile with five year/ 75,000-mile warranty of body structure.

### CHEVROLET SPECIFICATIONS

- Chevy Express cutaway
- 139" wheel base
- 4.8L gas engine
- 4-speed automatic transmission
- 10,000 lb. GVWR
- B3D schoolbus package
- OEM driver's seat
- Rear axle 4:10
- Dual rear wheels
- AM/FM stereo
- (6) LT225/75R16/D tires
- 50 state emission
- Power brakes/power steering

### DIMENSIONS

- Exterior width – 95" at wheel flare
- Exterior height – 99"
- First step to ground – 12" second- and third-step riser – 9" max.
- Step tread depth – 9.5" max.
- Entrance clear opening – 27" x 73" min.
- Interior width at seat level– 82"
- Center aisle headroom – 69"

### STANDARD FEATURES

#### Exterior

- 24" x 30" windows – 31% tint
- Rear emergency door
- 6.75" x 9.75" flat & 6" x 3.5" convex mirrors
- White steel rubrails
- White exterior colored body
- Heavy duty rear bumper (10 ga.)
- Front and rear mudflaps
- Body undercoating
- Back-up alarm
- Cross-view mirrors

#### Interior

- Safety yellow entry stanchions
- 4 speakers & 4 courtesy lights
- Drivers switch console
- Track seating
- OEM chassis - AM/FM stereo
- Black floor rubber
- White step nosing
- Driver's 6" x 9" mirror
- White Filon interior
- Rear door lock w/interlock



2592 East Kercher Road • Goshen, IN 46528

Toll-Free: 877-258-1391

[www.StarTransBus.com](http://www.StarTransBus.com)

© 2009 Supreme Corporation

